

EVAC 50X

METAL CEILING LOUDSPEAKERS WITH STEEL FIRE DOME

Designed for installation in false ceilings or panels, the EVAC 50X is ideal for voice alarm systems, offering clear and intelligible speech reproduction as well as background music capability. It complies with the EN 54-24 standard and is equipped with a ceramic terminal and thermal fuse for enhanced safety and reliability.




Technical Specifications	EVAC 50X
Rated power	6 W
Transformer power taps	6 W - 3 W - 1.5 W - 0.75 W - 0.25 W
Sensitivity	92 dB (1W/1 m)
Maximum SPL	104 dB (P _{max} /1 m) at 3651 Hz
Frequency response	150 Hz - 18 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	5" (127mm)
Dimensions	Ø 180 mm x 130 mm
Weight	1.32 kg
Material	Steel
Colour	Speaker - white (RAL9016), fire dome - orange (RAL2008)


EVAC 50X

METAL CEILING LOUDSPEAKERS WITH STEEL FIRE DOME




Frequency response

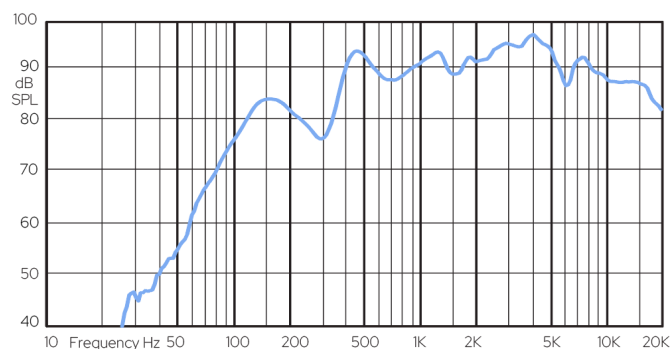

Impedance

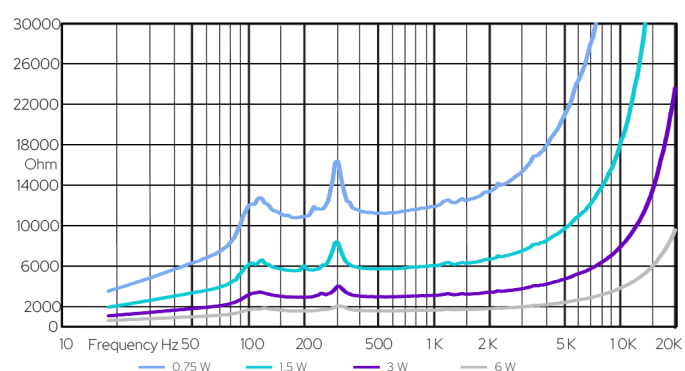

Horizontal/vertical polar diagrams



Dimensions

